


RG-EST100-E

2.4 GHz 300 Mbps Wireless Bridge

Configuration-free connectivity for elevator and short-range CCTV.

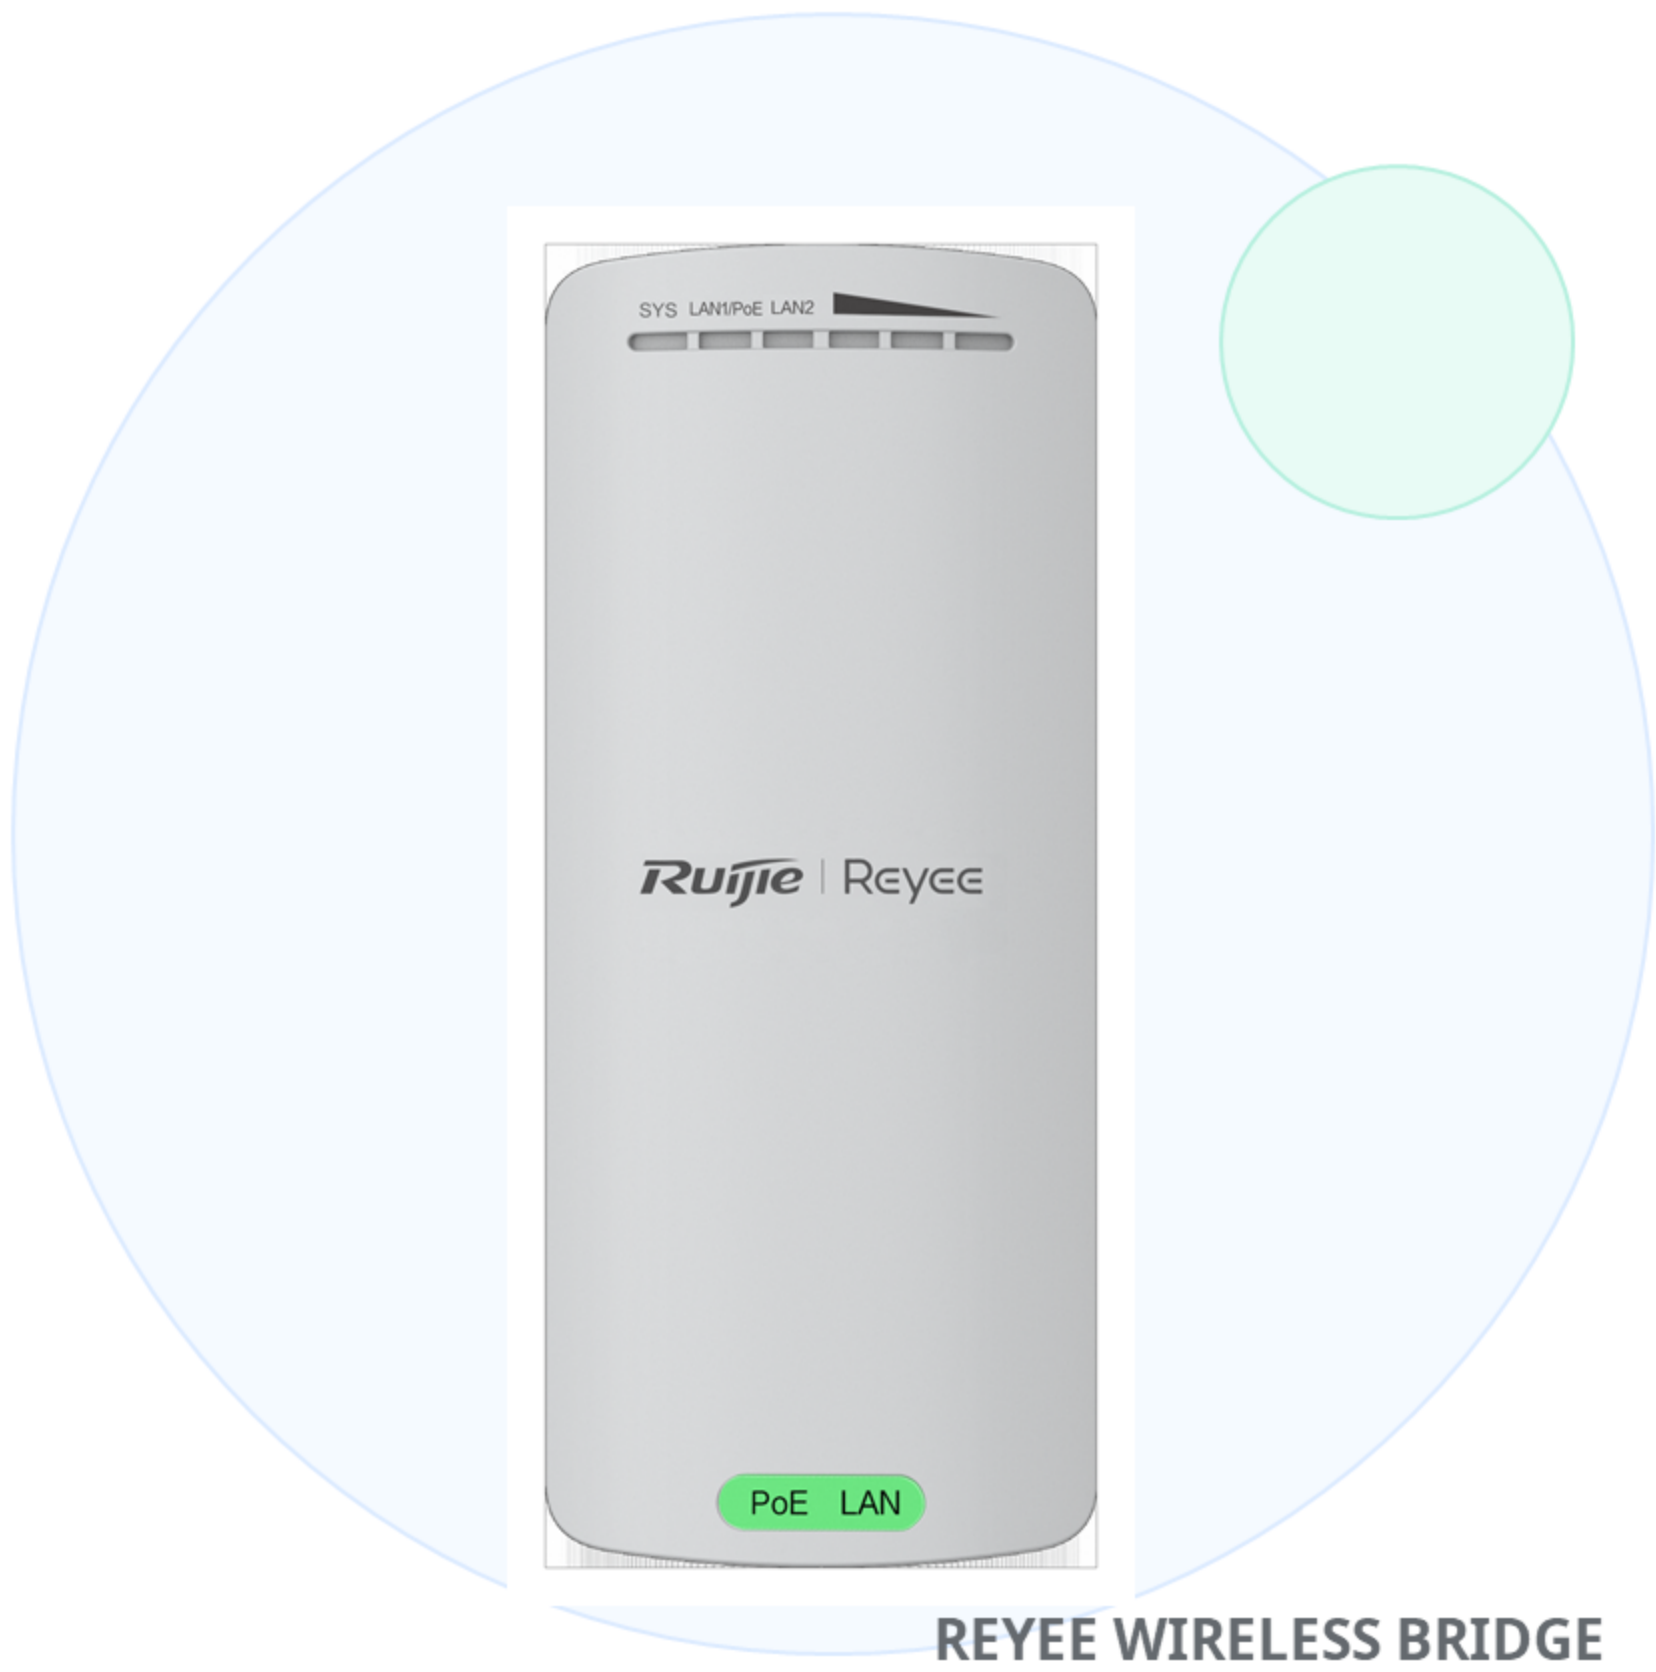

REYEE WIRELESS BRIDGE

500 m
Recommended Distance

8 dBi
Directional Antenna

300 M
2.4 GHz Wireless Rate

2 × FE
Ethernet Ports

IP55
Outdoor Protection

Cloud
Remote O&M

BEST-FIT PROJECTS

Elevator Cab CCTV
Short-range video backhaul through the elevator shaft.

Small-Site CCTV
Supports up to five 720p cameras within 500 m.

TOP 3 SELLING POINTS

Factory Pre-Paired
The pair-selling kit works after power-on, with no configuration required.

Outdoor-Ready Design
IP55 protection, rust-resistant ports and 6 kV surge protection.

Cloud-Based Maintenance
View topology, optimize interference and reboot devices remotely.

WHY INSTALLERS CHOOSE REYEE

FACTORY PRE-PAIRED
Plug and play. No configuration required.

CLOUD MANAGEMENT
Real-time monitoring and remote O&M.

GOOD QUALITY
IP55 protection and 6 kV surge protection.

RG-EST310 V2

5 GHz 867 Mbps 1 km Wireless Bridge

Stable industrial CCTV links with automatic pairing and cloud O&M.



REYEE WIRELESS BRIDGE

1 km
Recommended Distance

10 dBi
Directional Antenna

867 M
5 GHz Wireless Rate

1 × FE
Ethernet Port

IP54
Outdoor Protection

Auto
Automatic Pairing

BEST-FIT PROJECTS

Warehouse / Factory
Stable 5 GHz backhaul for industrial CCTV points.

Crane & Port CCTV
Up to 1 km line-of-sight transmission without shelter.

TOP 3 SELLING POINTS

Stable 5 GHz Link
867 Mbps wireless rate for a recommended distance up to 1 km.

Automatic Pairing
Pair-selling design reduces configuration work before deployment.

Cloud Management
Real-time monitoring and remote O&M.

WHY INSTALLERS CHOOSE REYEE

FACTORY PRE-PAIRED
Plug and play. No configuration required.


CLOUD TOOLS
AI heatmap, alignment tool, Spectrum Scan and Link Optimization.

GOOD QUALITY
IP54 protection and 4 kV surge protection.

RG-EST330F-P

5 GHz 867 Mbps 3 km PoE-Out Bridge

Power cameras directly at remote CCTV poles.

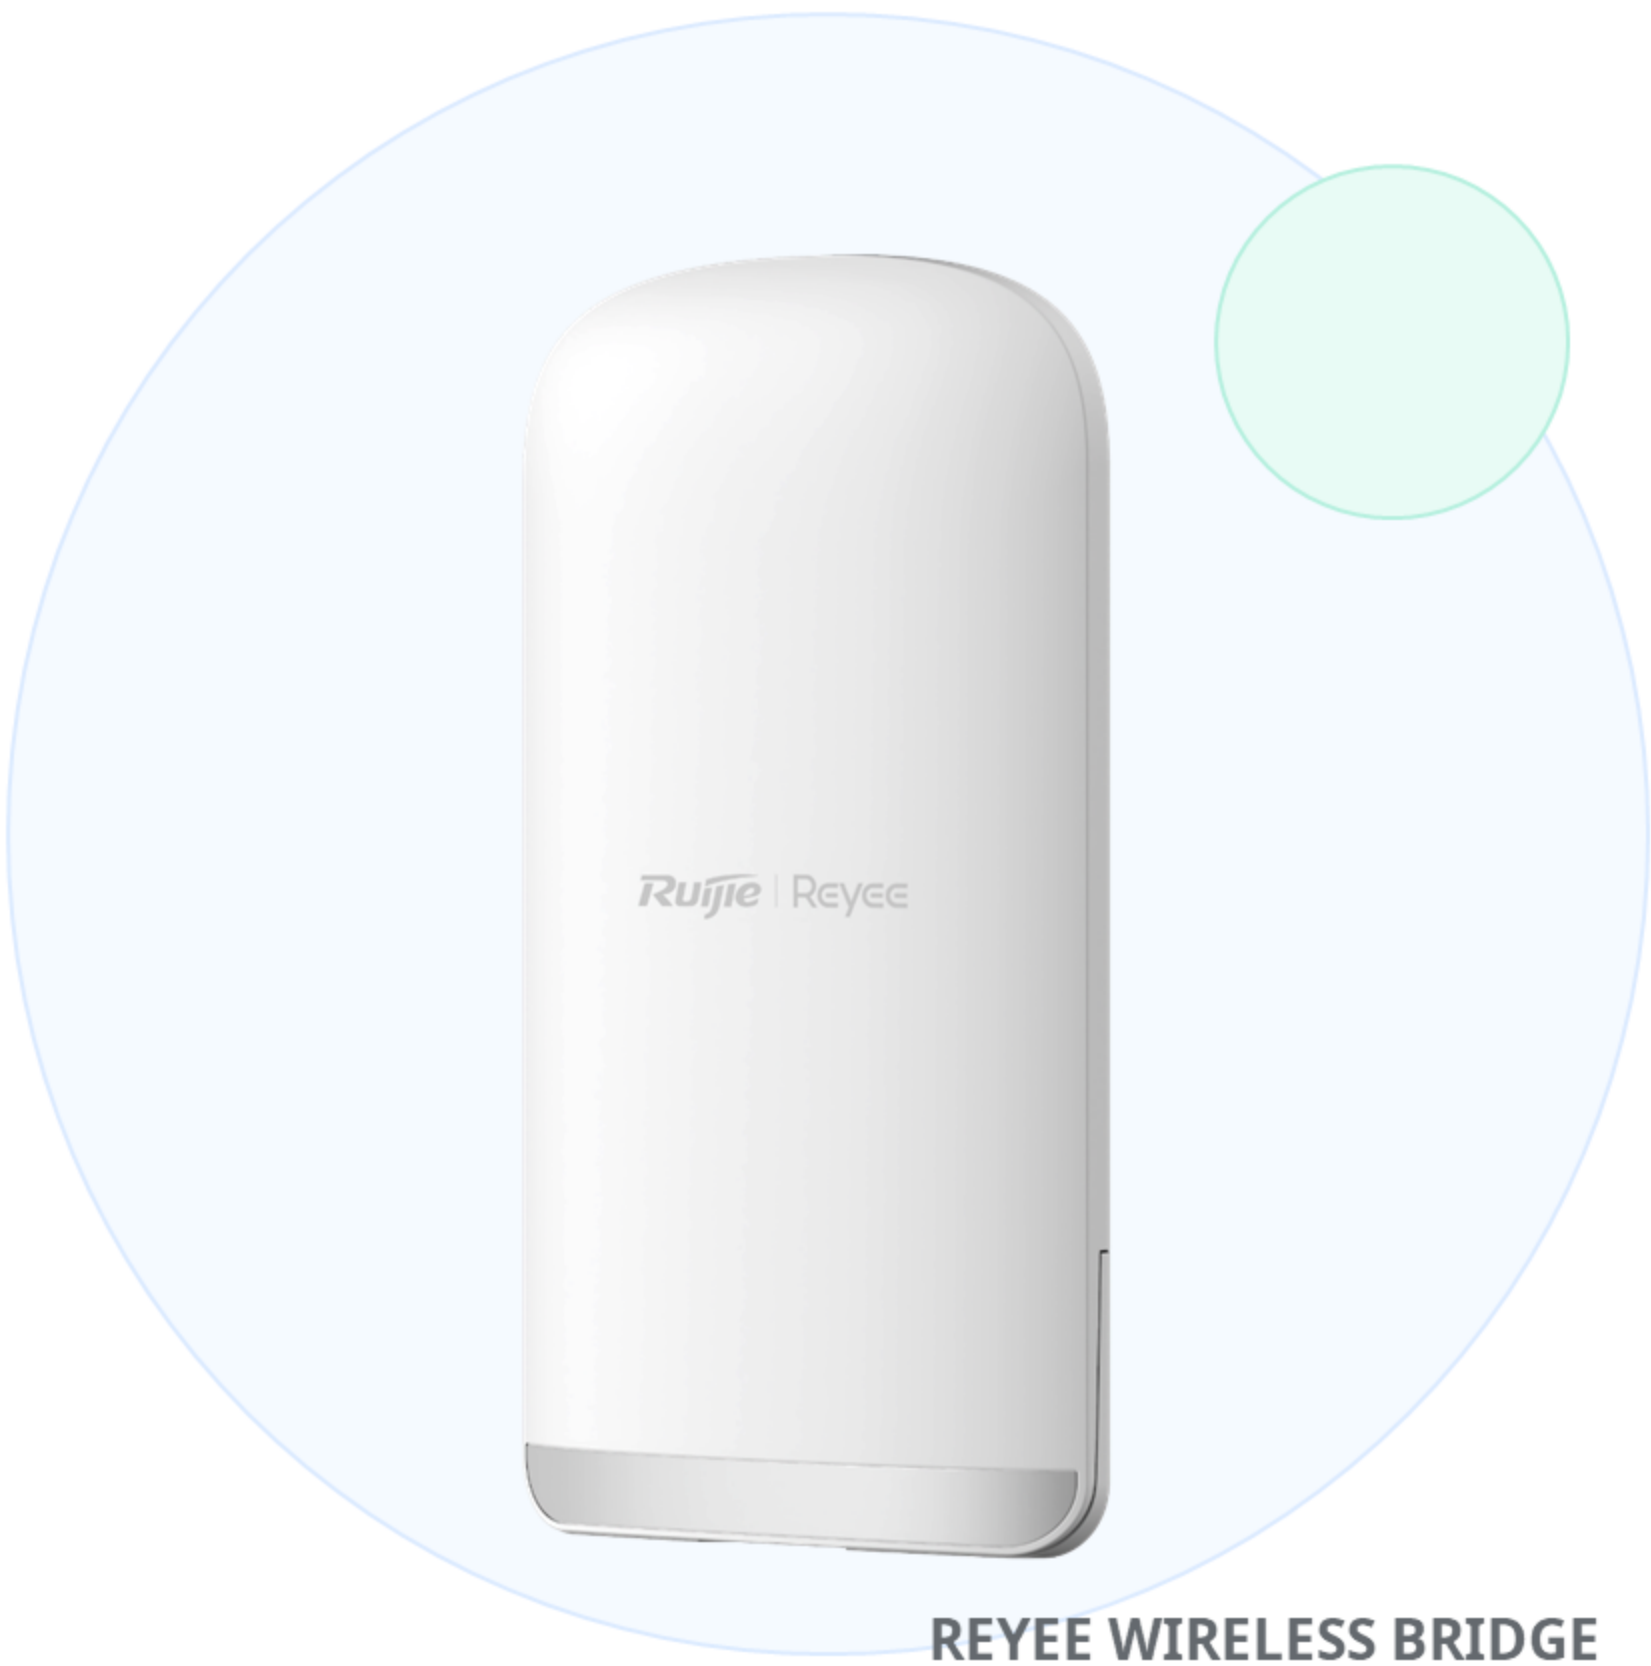

REYEE WIRELESS BRIDGE



3 km
Recommended Distance



13 dBi
Directional Antenna



867 M
5 GHz Wireless Rate



3 × FE
Ethernet Ports



2 × PoE
PoE-Out Ports



TDMA
Efficient Air Time



Construction-Site Pole
Bridge and camera deployment on a remote outdoor pole.



Centralized CCTV
Simplified backhaul from outdoor poles to a central monitoring room.



Dual PoE-Out
Two PoE-out ports can directly power connected cameras or APs.



Three Power Inputs
Supports 802.3af/at, 24 V passive PoE and 12 V DC input.



Cloud Tools
AI heatmap, alignment tool, Spectrum Scan and Link Optimization.



DUAL POE-OUT
Two PoE-out ports save one PoE switch.



CLOUD MANAGEMENT
Real-time monitoring and remote O&M reduce after-sales costs.



THREE POWER INPUTS
802.3af/at PoE, 24 V passive PoE and 12 V DC for flexible power access.

*PoE-out is available with 802.3at or 24 V passive PoE input; total PoE-out power is 15.4 W.

RG-EST350G

5 GHz 867 Mbps 5 km Gigabit Bridge

Configuration-free point-to-point backhaul across long outdoor links.



REYEE WIRELESS BRIDGE



5 km
Recommended Distance



16 dBi
Directional Antenna



867 M
5 GHz Wireless Rate



3 × GE
Gigabit Ports




IP55
Outdoor Protection



Cloud
Remote O&M

BEST-FIT PROJECTS

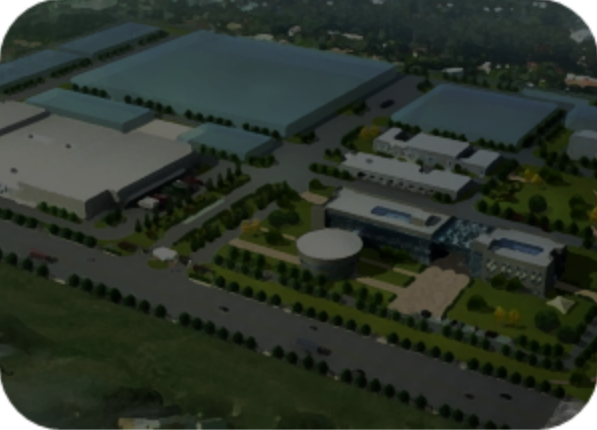

Factory
Point-to-point CCTV backhaul between industrial buildings.



Construction Site
Video backhaul across large outdoor work zones.



Farm
Long-range CCTV backhaul across open fields and remote facilities.

TOP 3 SELLING POINTS



Factory Pre-Paired
The pair-selling kit works after power-on, with no configuration required.



Three Power Inputs
Supports 802.3af/at, 24 V passive PoE and 12 V DC input.



Cloud Tools
AI heatmap, alignment tool, Spectrum Scan and Link Optimization.

WHY INSTALLERS CHOOSE REYEE



FACTORY PRE-PAIRED
Plug and play. No configuration required.



CLOUD MANAGEMENT
Real-time monitoring and remote O&M reduce after-sales costs.




THREE POWER INPUTS
802.3af/at PoE, 24 V passive PoE and 12 V DC for flexible power access.

RG-EST450G

5 GHz 867 Mbps 120° PtMP Base Station

One base station for small and medium outdoor CCTV projects.

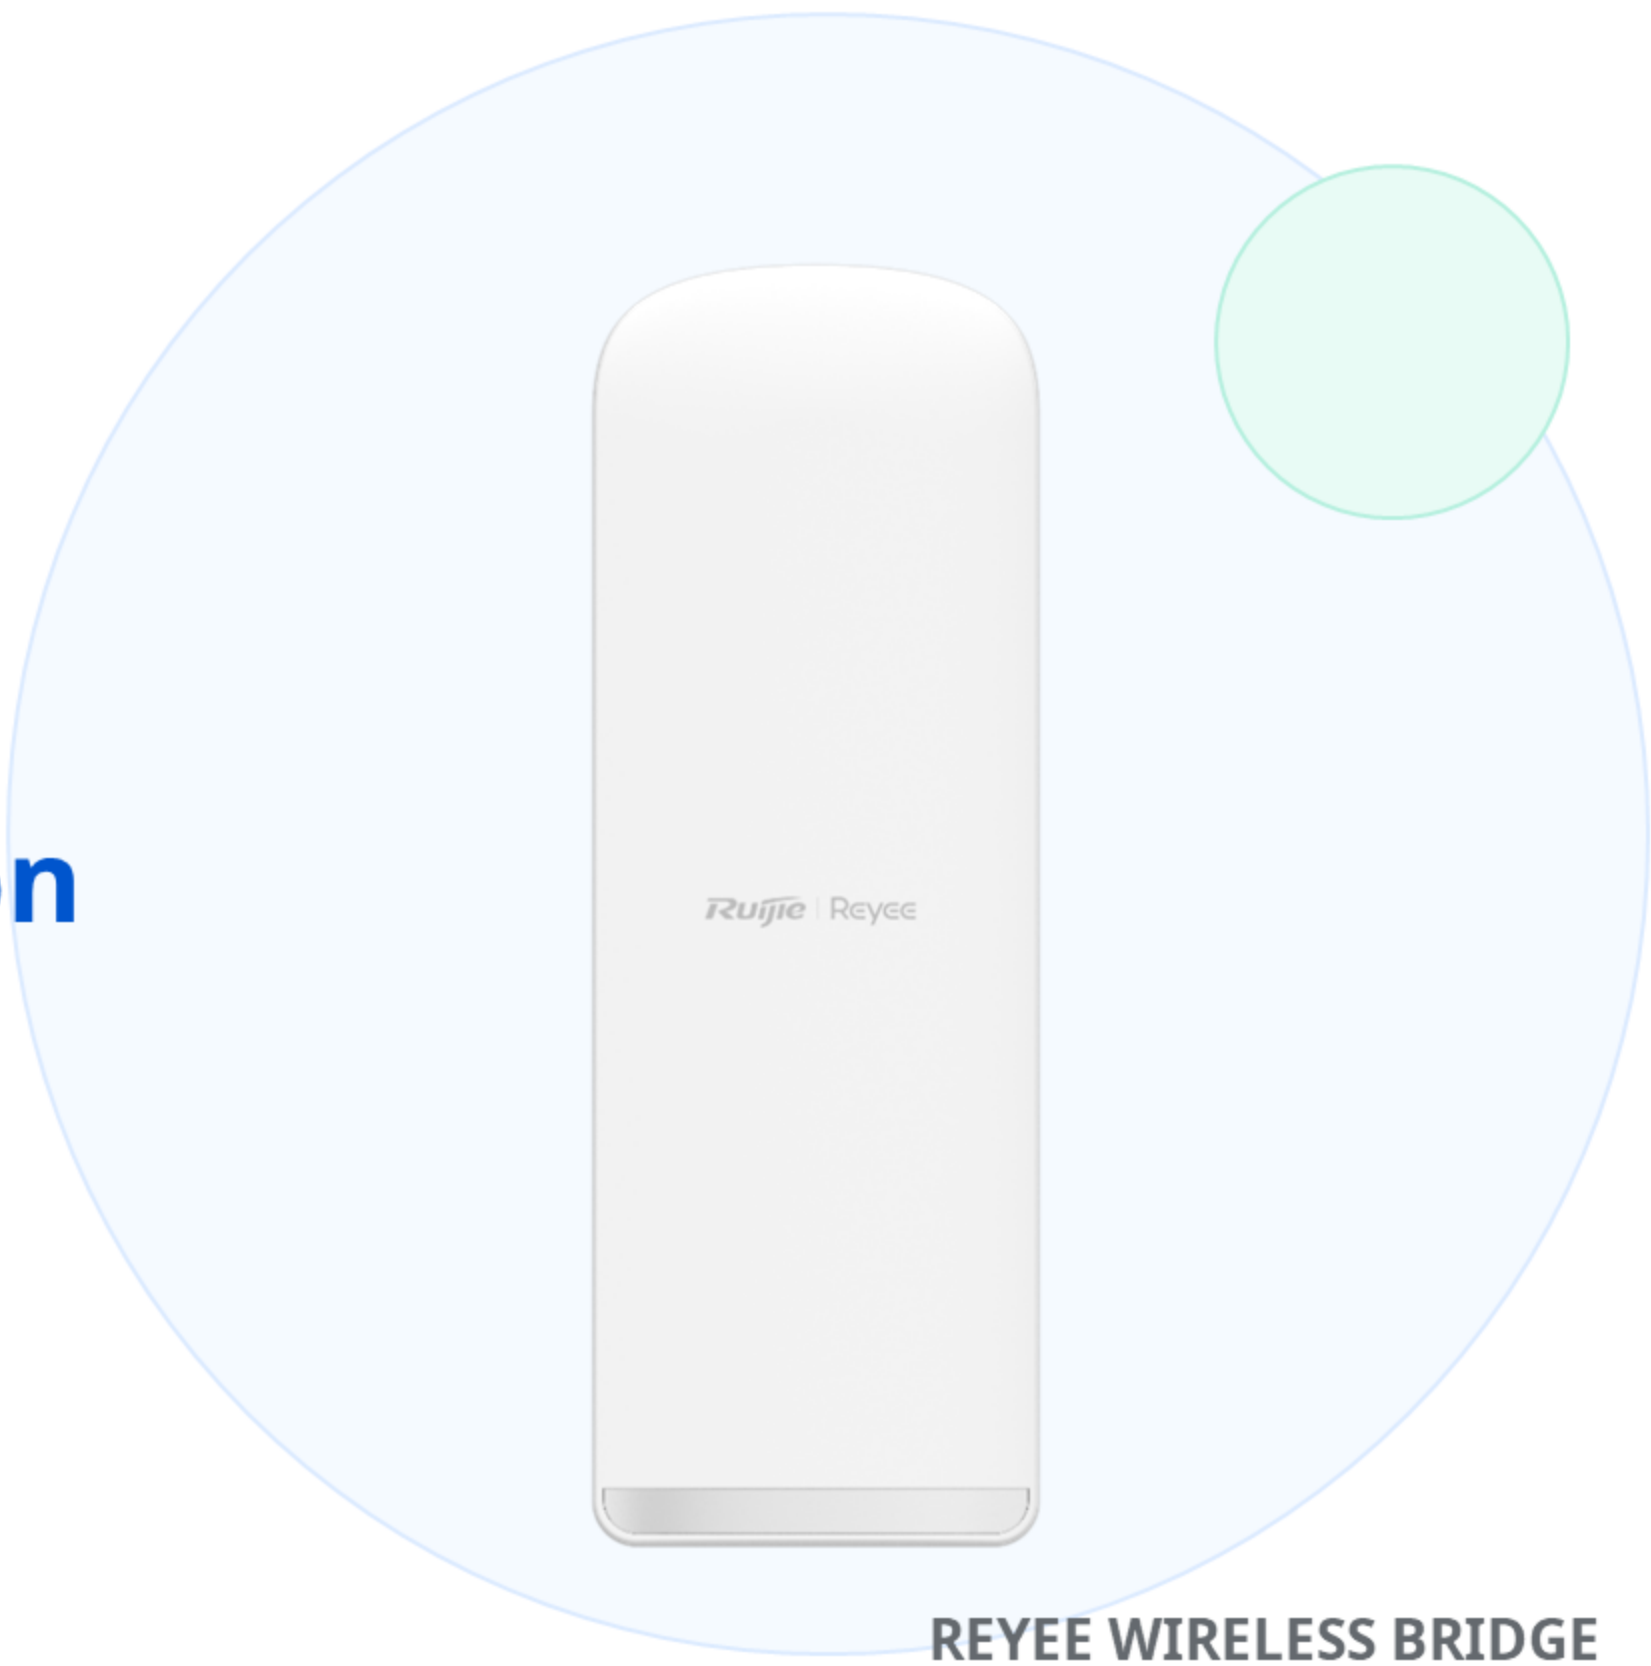

REYEE WIRELESS BRIDGE



120°

Horizontal Coverage



1:16

Maximum CPE Count



867 M

5 GHz Wireless Rate



15 dBi

Built-In Antenna



3 × GE

Gigabit Ports



IP55

Outdoor Protection

BEST-FIT PROJECTS



Parking Lot Coverage

A centralized PtMP base station for distributed CCTV points.



Construction Site

Lite PtMP coverage for projects with 5-15 bridges in total.

TOP 3 SELLING POINTS



One-Touch Pairing

Power on all bridges, then briefly press the button to pair them all at once.



Three Power Inputs

Supports 802.3af/at, 24 V passive PoE and 12 V DC input.



Cloud Tools

AI heatmap, alignment tool, Spectrum Scan and Link Optimization.

WHY INSTALLERS CHOOSE REYEE



FLEXIBLE CPE CHOICE

Works with EST330F-P, EST350G and supported AirMetro CPEs.



CLOUD MANAGEMENT

Real-time monitoring and remote O&M reduce after-sales costs.



THREE POWER INPUTS

802.3af/at PoE, 24 V passive PoE and 12 V DC for flexible power access.

Recommended combinations: up to 3 km with EST330F-P; up to 5 km with EST350G.